EcoFlex
PANEL SYSTEM

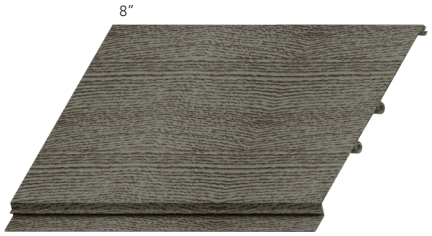

PANEL COMPONENTS

Standard Panel & Trim Lengths: 24'
Panel Widths: 3", 4", 6", 8"
Endcaps: 3", 4", 6", 8"
J-Trim
Corner Trim

RESOURCES

Specifications
CAD Files
Connection Details
Installation Guides
Warranty Information
Cleaning and Care

PHYSICAL DATA

6063-T6 Extruded Aluminum Alloy
100% Recyclable
Nominal Wall Thickness: .063"
3" Extruded Panel Weight: .516 lb*
4" Extruded Panel Weight: .590 lb*
6" Extruded Panel Weight: .743 lb*
8" Extruded Panel Weight: .890 lb*
ASTM E84 Class A Fire Rating

Per Liner Foot

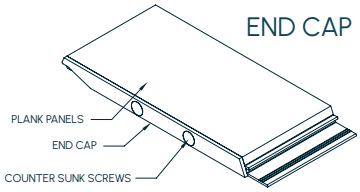

ATTACHMENT

Panels & Trim: #10 Screw Appropriate for Wall Type
Screws to be Fastened for Panel Trim Every 30"
Optional End Caps: Blind Pop Rivets or #10 Countersunk Screw
Fastener Package Available Upon Request

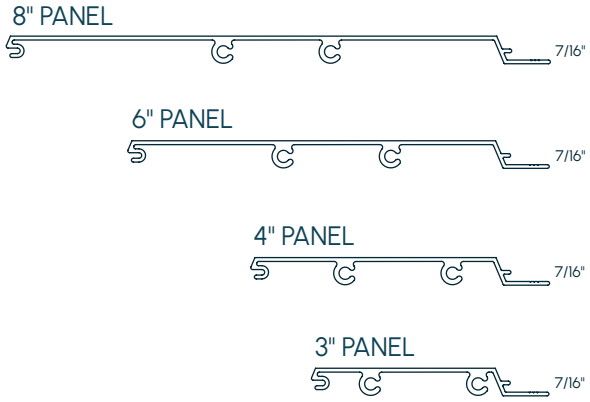

FINISHES

AAMA 2604 & 2605 Powder Coat
Wood Grain & Solid Color Powder Coat

WARRANTY

Material: 50 Years
AAMA 2604 Finish: 15 Years
AAMA 2605 Finish: 20 Years

ALUMINATION
ARCHITECTURAL PRODUCTS
INNOVATIVE DESIGN. CONTRACTOR APPROVED. POWERED BY ARCH-FAB.
817.678.4440
info@alumination-ap.com
2108 E. Richmond Fort Worth, TX 76104